

DESCRIPTION

The B3RX1620 is a low noise front end for X-band marine radar receiver. It comprises a low noise amplifier with monitor circuit, an image rejection mixer and an electronically tuned local oscillator.

Frequency range 9320 to 9500 MHz
I.F. output frequency 60 MHz
Noise figure 2.5 dB


GENERAL DATA

Operating voltage 5 V d.c.
Operating current 60 mA
Overall dimensions 88 x 31 x 42 mm max
Net weight 100 g approx
Waveguide size WR90 (WG16)

MAXIMUM AND MINIMUM RATINGS

	MIN	MAX	
Operating voltage (see note 1).	-	+6	V
Tuning voltage	0	45	V
R.F. input (1uS,1kHz, repetitive)	-	500	mW
Body temperature:			
Operating	-30	+85	°C
Storage	-55	+125	°C
Vibration (50Hz)	-	20	g
Shock (11ms, half sine)	-	25	g

BLOCK DIAGRAM

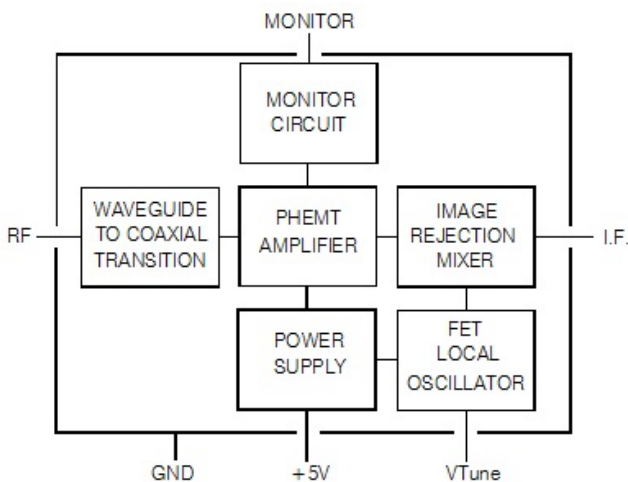

TYPICAL OPERATION

Operating Conditions

Operating voltage 5.0 +/- 0.2V
Signal frequency 9410 +/- 90MHz
Local Oscillator frequency tuning voltage 4V 9380 MHz max
tuning voltage 24V 9560 MHz min

TYPICAL Performance (at 25 °C)

	Min	Typ	Max	
Operating current	-	55	100	mA
Noise figure	-	2.5	3.5	dB
Conversion gain	2.5	5.0	-	dB
Image rejection ratio	15	20	-	dB
Frequency pulling	-	0.2	0.6	MHz
(See note 2)				
Input power at 1dB compression	-10	-	-	dBm
Saturated I.F. output	0.8	1.0	-	V
Local Oscillator Switch on drift (3min to 40min)	-	-	4	MHz
Local Oscillator temperature drift	0	-200	-350	kHz/°C
Tune rate	10	14	18	MHz/V
I.F. frequency (3dB B.W.)	50	60	70	MHz
I.F. output impedance	-	50	-	Ω
Tune I/P impedance	1	-	-	MΩ
Monitor voltage	30	50	70	mV

NOTES


1. Positive only; negative voltage must not be applied.
2. Input power 10 dBm.
3. External voltages must not be applied to the I.F. or monitor terminals.



Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

e2v technologies (uk) limited, Waterhouse Lane, Chelmsford, Essex CM1 2QU United Kingdom Holding Company: e2v technologies plc
Telephone: +44 (0)1245 493493 Facsimile: +44 (0)1245 492492
Contact e2v by e-mail: enquiries@e2v.com or visit www.e2v.com for global sales and operations centres.

OUTLINE (All dimensions in mm; dimensions without limits are nominal)

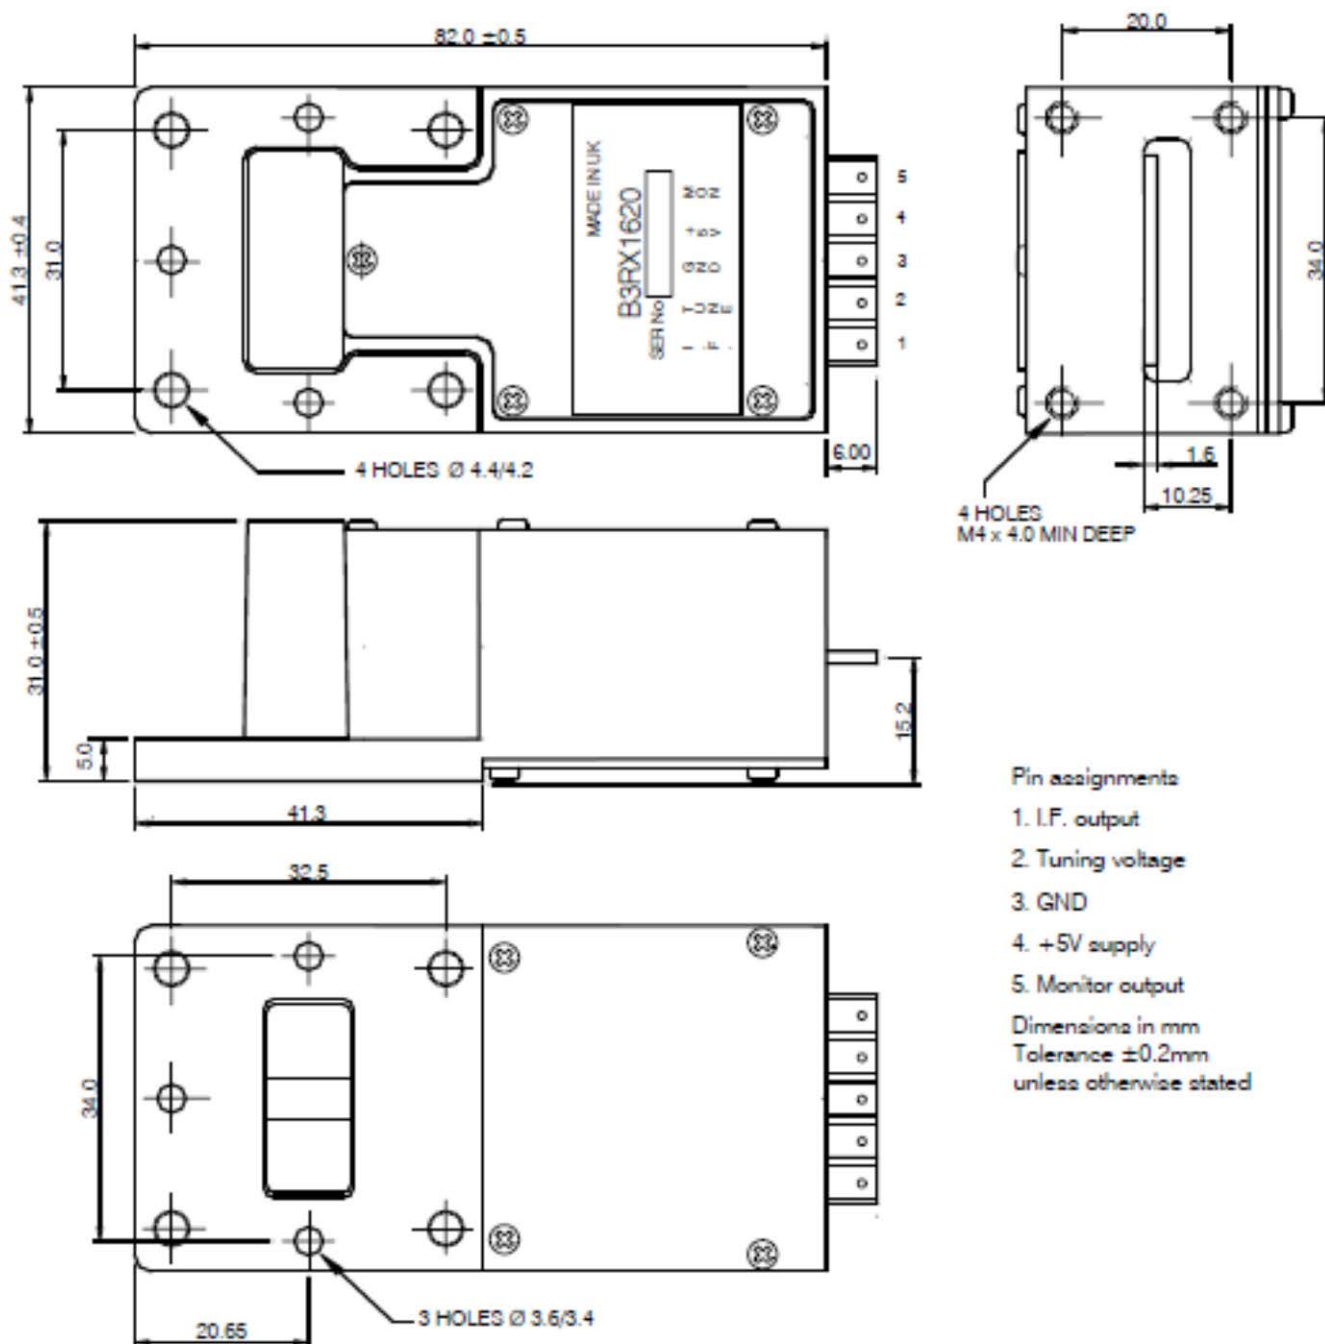

NZ T: +64 9 4145520
 AU T: 1800 148 793
 E: sales@aepacific.co.nz
 www.aepacific.com